


高純度の銅条・銅板より製造される圧着端子で、R型・RD型はJIS規格、UL規格(カナダ向け認証含む)に適合しております。



■ 銅線用裸圧着端子(R型)

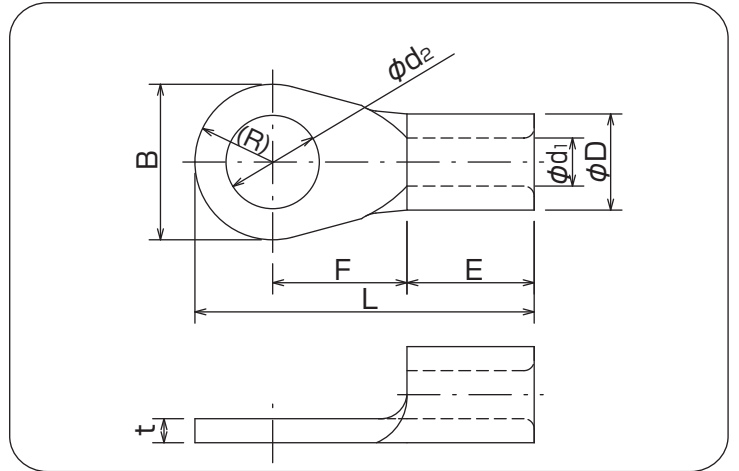

RoHS

単位:mm

呼び	φd ₂	B	L	F	E	φD	φd ₁	t	電線抱合容量(参考)			適合工具	一箱入数								
									単線mm	撚線mm ²	AWG										
5.5	3.2	9.5	19.6	8.35	6.5	5.6	3.4	0.95	1.82	2.63	12-10	5N18 214A AC-5ND (1号ヘッド)	1000 (100×10)								
		8.0	18.5	8.0																	
		7.0	18	8.0																	
	3.7	9.5	19.6	8.35																	
		8.0	18.5	8.0																	
		7.0	18	8.0																	
	4.3	9.5	19.6	8.35																	
		8.0	18.5	8.0																	
		7.0	18	8.0																	
	5.3	9.5	19.6	8.35																	
		8.0	18.5	8.0																	
	6.4	12	25.3	12.8									5.5	5.6	3.4	0.95	1.82	2.63	12-10	5N18 214A AC-5ND (1号ヘッド)	500 (100×5)
		13.3	23	9.85																	
		9.5	19.6	8.35																	
	8.4	15	28.2	14.2																	
		13.3	23	9.85																	
		12	25.3	12.8																	
	10.5	15	28.2	14.2																	
13	19.2	32.5	16.4																		
15	32	48	25.5																		
17																					
19																					
21																					
100																					

- (注意) ・各部の寸法は予告なく変更することがあります。
 ・太字は、JIS規格品です。
 ・UL登録品として御使用の場合、ご注文時にご指示下さい。
 ・斜体はUL登録工具です。詳しくはパッケージの説明書をご覧ください。